

.079"X.079" (2.0mm) IDC Socket Connector For 1.0mm Center Flat Ribbon Cable

APPLICATION AND FEATURES



1. FTF- Series Flat Cable connector is designed for which require small and light internal connector.
2. Mate with 2.0mm pitch and □ 0.5mm pin headers.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Max Processing Temp: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40~+105°C
 Contact Material: Phosphor bronze
 Insulator Material: Polyester, UL 94V-0
 ©Standard: P.B.T

Finish: Duplex plated
 ©Standard: Duplex plating

©Note:
 Duplex plating: gold plated on contact area,
 Tin on solder area

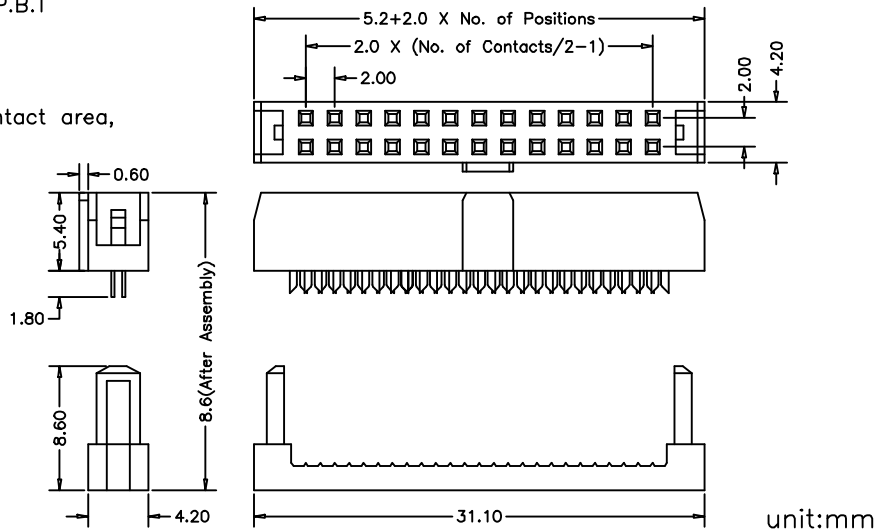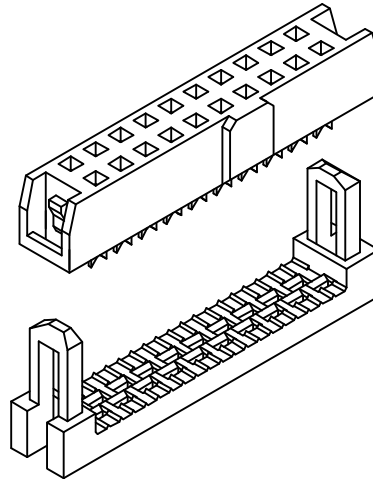

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N

(FTF)

F **T** **F** - **X** **X** - **X** - **X**

0:W/O Polarization Bump
 1:With Polarization Bump

Number of Contacts

No. of contact = Code
10
14
16
20
26
34
40
44
50
60

Contact Plating

Definition	Code
©Duplex plating:	
flash	K
©Standard: K	

APTOS Technology - (831)-688-0881