

No. of Contacts	DIMENSIONS	
	A	B
1		2.54
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	80.98




PACF-XX-X-030  
 Number of Contacts | Pin Length mm  
 | Contact Plating

Definition	Code		
◎ Tin plated:	A		
◎ Gold plated:			
flash	B	15μ"	F
10μ"	E	30μ"	J
◎ Duplex plating:			
flash	K	15μ"	P
10μ"	N	30μ"	U
◎ Standard:	B		

SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms min.  
 Contacts resistance: 20 m ohms max.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40~+105°C  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 ◎ Standard: P.B.T

Finish: Tin, Gold or Duplex plated  
 ◎ Standard: Gold flash all over  
 ◎ Note:  
 Duplex plating: gold plated on contact area,  
 Tin on solder area

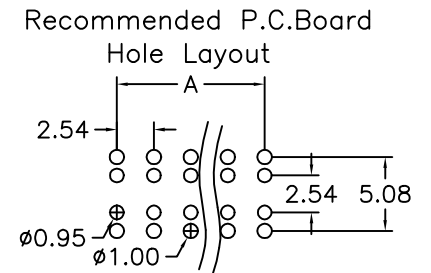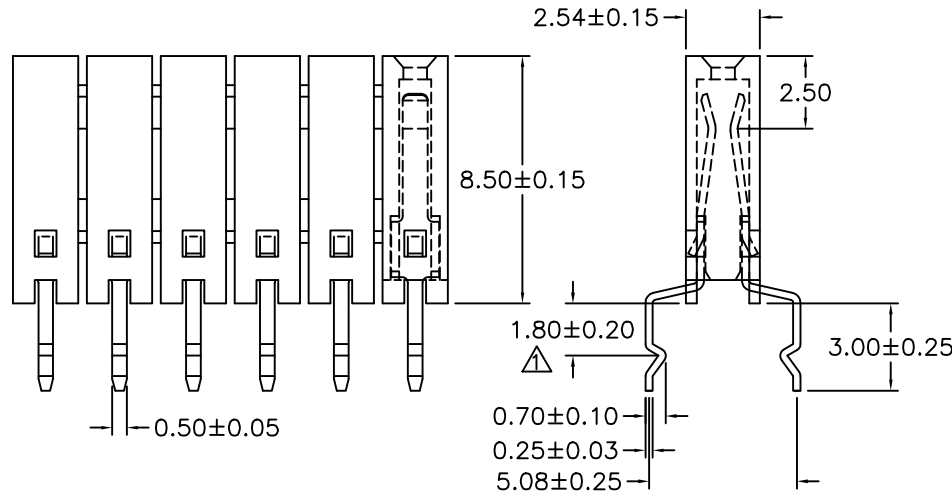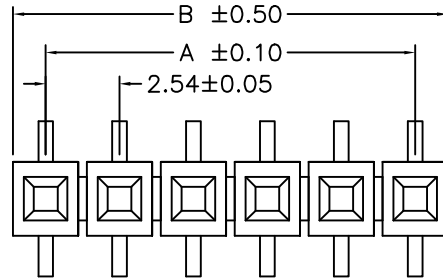

1.40±0.15 | VERSION | 1.80±0.20 | 28-09-01'



GENERAL TOLERANCE		SCALE	DRAWN	DATE	DWG. NO.	TITLE	REV.
XX. ±	XXX. ±	4=1		-09-01'		PACF Series	1.1
X. ±	.XXX ±	UNIT	CHECK	-09-01'	F:\DWG\CDWG\PAC\PACFSOA.DWG		SHEET
.X ±	X. ±	SIZE	APPROVE	-09-01'	PARTS NO.		1/2
.XX ±	.X ±	A4			PACF-XX-X-030		

No. of Contacts	DIMENSIONS	
	A	B
1	2.54	2.54
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	80.98



PACW-XX-X-030  
 Number of Contacts | Pin Length mm  
 Contact Plating

Definition	Code		
◎ Tin plated:	A		
◎ Gold plated:			
flash	B	15μ"	F
10μ"	E	30μ"	J
◎ Duplex plating:			
flash	K	15μ"	P
10μ"	N	30μ"	U
◎ Standard:	B		


SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms min.  
 Contacts resistance: 20 m ohms max.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40~+105°C  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 ◎ Standard: P.B.T

Finish: Tin, Gold or Duplex plated  
 ◎ Standard: Gold flash all over  
 ◎ Note:  
 Duplex plating: gold plated on contact area,  
 Tin on solder area

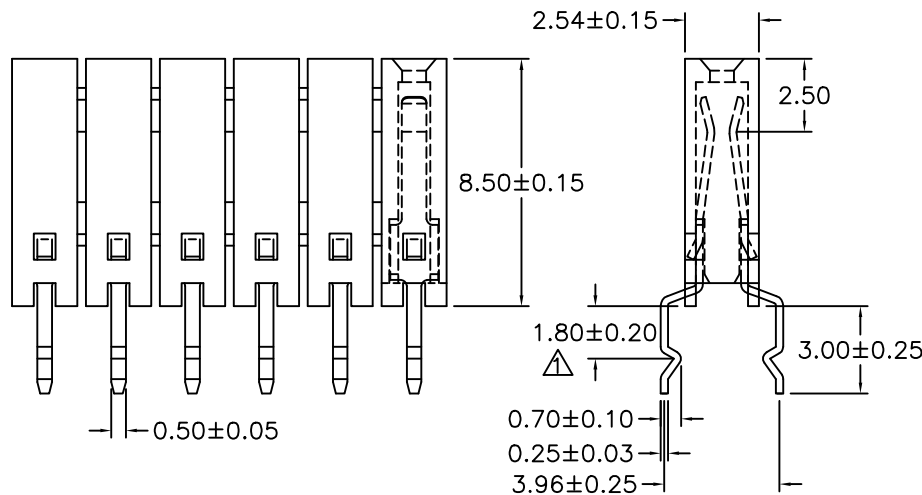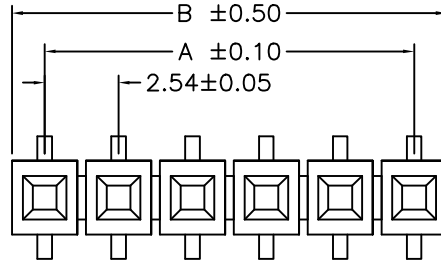

Recommended P.C.Board Hole Layout

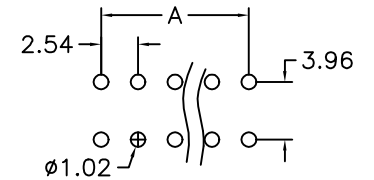

▲ 1.40±0.15	VERSION	1.80±0.20	28-09-01'
-------------	---------	-----------	-----------



GENERAL TOLERANCE		SCALE	DRAWN	DATE	DWG. NO.	TITLE	REV.
XX. ±	XXX. ±	4=1		-09-01'		PACW Series	1.1
X. ±	.XXX ±	UNIT	CHECK	-09-01'	F:\DWG\CDWG\PAC\PACWS0A.DWG		SHEET
.X ±	X. ±	SIZE	APPROVE	-09-01'	PARTS NO.		1/2
.XX ±	.X ±	A4			PACW-XX-X-030		