

.079" (2.0mm) Pin Header

Dual Row 06 to 78 Contacts Low Profile 1.0 mm Height 0.5 mm SQ Post

APPLICATION AND FEATURES




1. Variable pin length, gold plated.
2. Standoffs facilitate post soldering clean.
3. Mate with P.C.Board connectors

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T

Finish: Gold Plated

©Standard: Gold flash all over

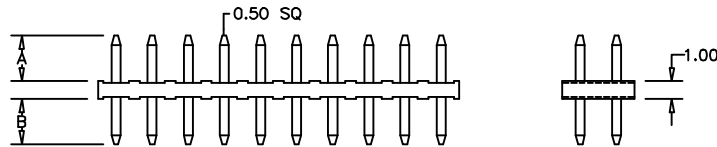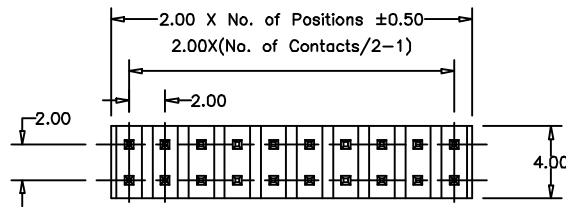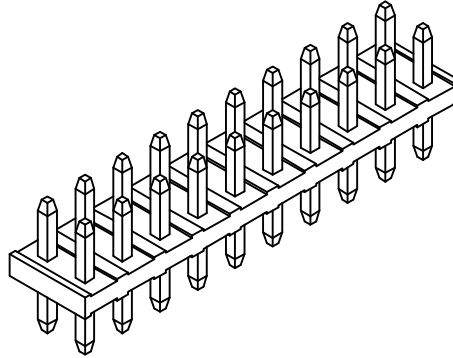

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N

(PAN) P A N - X X - X - A / B

Number of Contacts

No. of contact = Code
06 to 78 Contacts

Connector Type


--

Contact Plating

Definition	Code
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
©Standard: B	

Pin Length mm

A	B
2.50	2.50
if you desire an other length, by marking put desired length in the A / B.	
© Standard: 2.50/2.50	

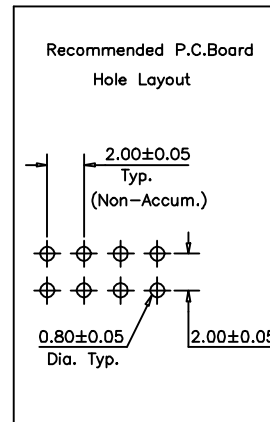

APTOS Technology - (831)-688-0881