

0.1" (2.54mm) Female Header

Dual Row 09 to 120 Contacts Low Profile: 5.0mm
High Quality Dual Beam Folded Contacts

APPLICATION AND FEATURES

1. Low profile 5mm height.
2. Designed for parallel and vertical board stacking.
3. Dual-beam folded contact.
4. Standoffs facilitate post soldering clean.
5. Mate with 0.64 S,Q Pin Header.

SPECIFICATIONS




Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 ©Standard: P.B.T

Finish: Tin, Gold or Duplex plated

©Standard: Gold flash all over

©Note:

Duplex plating: gold plated on contact area,
Tin on solder area

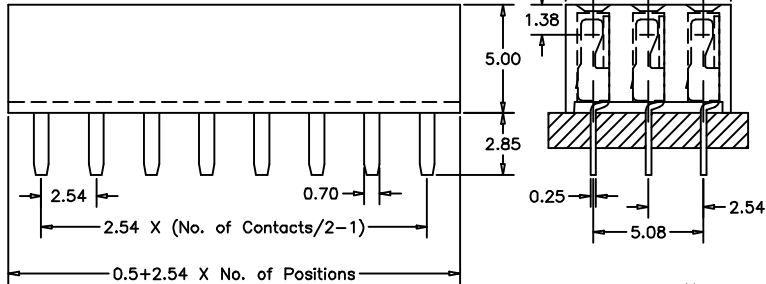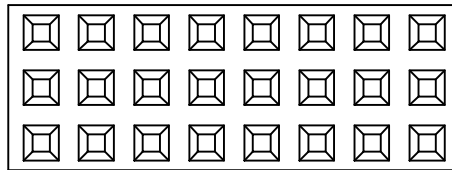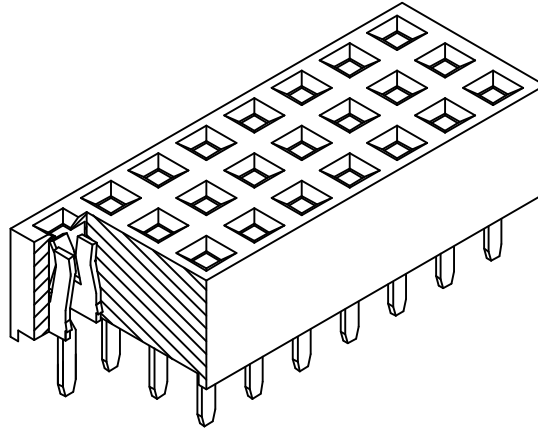

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

NEW P/N
P D F W - X X X - X -028

Number of Contacts

No. of contact = Code
09 to 99 Contacts
102 Contacts = A2
105 Contacts = A5
108 Contacts = A8
111 Contacts = B1
114 Contacts = B4
117 Contacts = B7
120 Contacts = C0


Connector Type

Definition	Code
Straight	S

Contact Plating

Definition	Code
© Tin plated:	A
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
©Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
©Standard: B	

Recommended P.C.Board Hole Layout



APTOS Technology - (831)-688-0881