

No. of Contacts	DIMENSIONS	
	A	B
4	2.54	5.58
6	5.08	8.12
8	7.62	10.66
10	10.16	13.20
12	12.70	15.74
14	15.24	18.28
16	17.78	20.82
18	20.32	23.36
20	22.86	25.90
22	25.40	28.44
24	27.94	30.98
26	30.48	33.52
28	33.02	36.06
30	35.56	38.60
32	38.10	41.14
34	40.64	43.68
36	43.18	46.22
38	45.72	48.76
40	48.26	51.30
42	50.80	53.84
44	53.34	56.38

PHAZ-XX-X-025

Number of Contacts

Contact Plating



Definition	Code		
☉ Gold plated:			
flash	B	15μ"	F
	E	30μ"	J
☉ Standard:	B		

SPECIFICATIONS


Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Contacts resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 ☉ Standard: P.P.S

Finish Gold plated
 ☉ Standard: Gold flash all over

*Product specifications are subject to change without notice. Please contact sales office for further confirmation

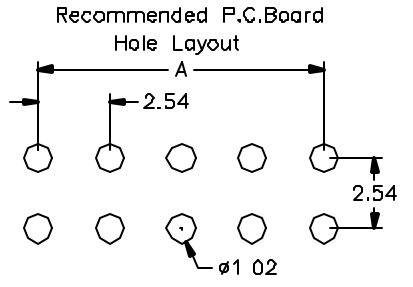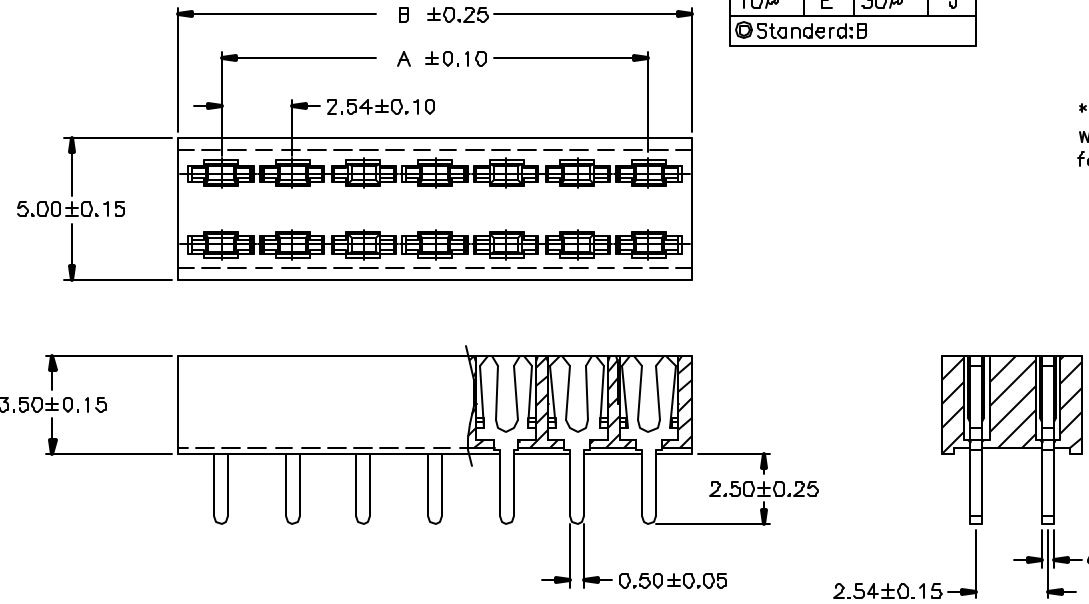

▲	VERSION	12-06-00'
▲	VERSION	13-02-01'



GENERAL TOLERANCE	
XX. ±	XXX. ±
X. ±	.XXX ±
.X ±	X. ±
.XX ±	.X ±

SCALE	4=1
UNIT	MM
SIZE	A4

DRAWN	DATE	-02-D1'
CHECK	DATE	-02-D1'
APPROVE	DATE	-02-D1'

DWG. NO.	F:\DWG\PHA\PHAZ0A.DWG
PARTS NO.	▲▲
PHAZ-XX-X-025	

TITLE	PHAZ Series
-------	-------------

REV.	1.2
SHEET	1/2