

# Multi Jumper

## Multiposition Shunt Connector

### APPLICATION AND FEATURES

1. Difference type from 2 to 10 position.
2. Multiposition jumper versions facilitate multiprogramming.
3. Dual Beam contact.
4. Mate with 2.54mm grid male header connectors.



### SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms min.  
 Contacts resistance: 20 m ohms max.  
 Dielectric withstanding: AC 1000 V  
 Operating Temperature: -40°~+105°C  
 Contact Material: Copper alloy  
 Insulator Material: Polyester,UL 94V-0

©Standard:P.B.T

Finish: Gold plated

©Standard: Gold flash all over

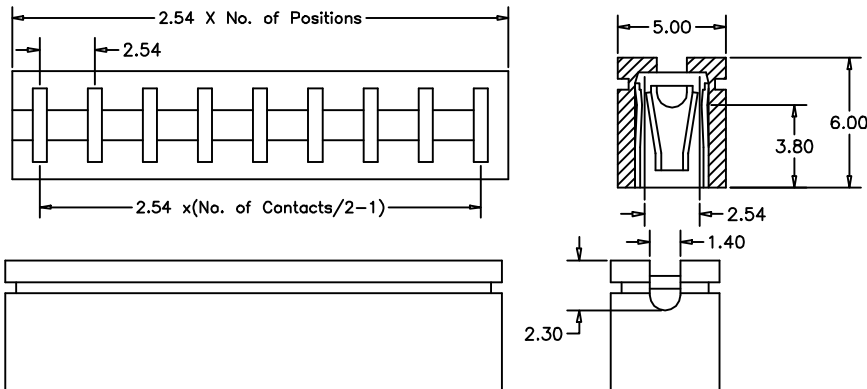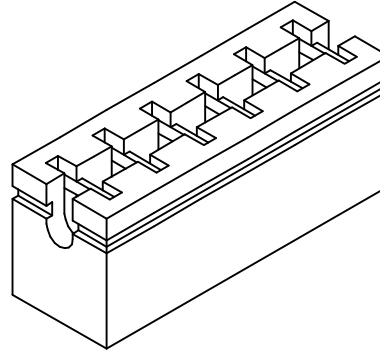

unit:mm

### How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N  
 (PMJ) **P M J** - **X X** - **X**

#### Number of Contacts

| No.of contact= Code                      |
|--|
| 04 to 20 Contacts<br>(2 to 10 positions) |

#### Contact Plating

| Definition     | Code |
|----------------|------|
| © Gold plated: |      |
| flash          | B    |
| ©Standard: B   |      |

|  |
|--|
|  |
|--|

|  |
|--|
|  |
|--|

APTOS Technology - (831)-688-0881