

No. of Contacts	DIMENSIONS	
	A	B
04	2.00	4.40
06	4.00	6.40
08	6.00	8.40
10	8.00	10.40
12	10.00	12.40
14	12.00	14.40
16	14.00	16.40
18	16.00	18.40
20	18.00	20.40
22	20.00	22.40
24	22.00	24.40
26	24.00	26.40
28	26.00	28.40
30	28.00	30.40
32	30.00	32.40
34	32.00	34.40
36	34.00	36.40
38	36.00	38.40
40	38.00	40.40
42	40.00	42.40
44	42.00	44.40
46	44.00	46.40
48	46.00	48.40
50	48.00	50.40
52	50.00	52.40
54	52.00	54.40
56	54.00	56.40
58	56.00	58.40
60	58.00	60.40
62	60.00	62.40
64	62.00	64.40
66	64.00	66.40
68	66.00	68.40
70	68.00	70.40
72	70.00	72.40
74	72.00	74.40
76	74.00	76.40
78	76.00	78.40
80	78.00	80.40

PQFZ-XXS-X-024

Number of Contacts

Contact Plating



Definition	Code
⊙ Tin plated:	A
⊙ Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
⊙ Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
⊙ Standard K	

**SPECIFICATIONS**


Current Rating: 1 Amp  
 Insulator resistance: 5000 Megohms min.  
 Contact resistance: 20 m ohms max.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40~+105°C  
 Max Processing Temp: 230° for 30 seconds  
 Contact Material: Phosphor Bronze.  
 Insulator Material: High Temperature Thermoplastic,UL 94V-0

Finish: Tin,Gold or Duplex plated  
 ⊙ Standard: Duplex plated  
 ⊙ Note:  
 Duplex plating: gold plated on contact area, Tin on solder area

\*Product specifications are subject to change without notice. Please contact sales office for further confirmation.

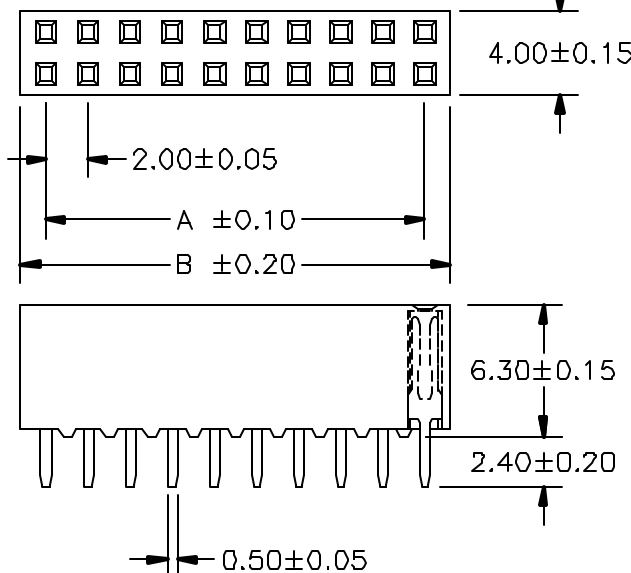

Recommended P.C.Board Hole Layout



⚠ WPIN/E VERSION p10U 05-03-02'



GENERAL TOLERANCE		SCALE	3=1	DRAWN	DATE	-03-02'	DWG. NO.	TITLE	REV.
XX. ±	XXX. ±	UNIT	MM	CHECK	DATE	-03-02'	F:\DWG\CDWG\PQF\PQFZ0A.DWG	PQFZ Series	1.1
X. ±	.XXX ±	SIZE	A4	APPROVE	DATE	-03-02'	PQFZ-XXS-X-024		SHEET
.X ±	X. ±								1/2
.XX ±	.X ±								