

.079" (2.0mm) Pin Header

Quad Row 120 Contacts

Straight

APPLICATION AND FEATURES

1. Variable pin length, selective gold or tin plated.
2. Standoffs facilitate post soldering clean.
3. Mate with P.C.Board connectors.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0



©Standard: Nylon-6T

Finish: Tin, Gold or Duplex plated

©Standard: Duplex plated

©Note:

Duplex plating: gold plated on contact area,
 Tin on solder area

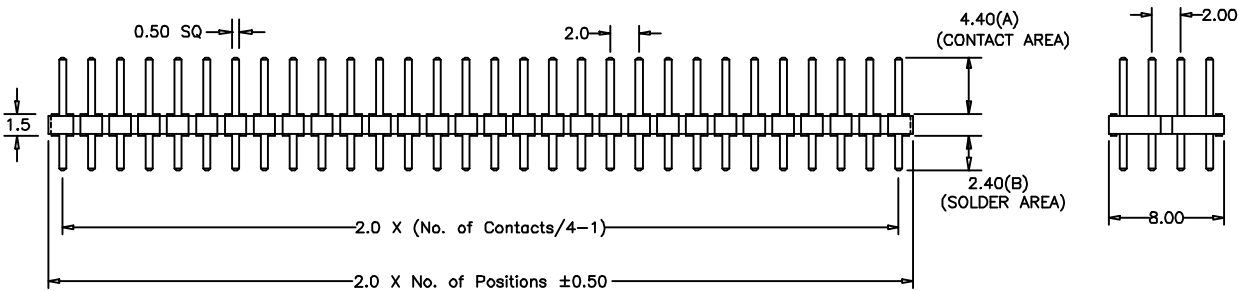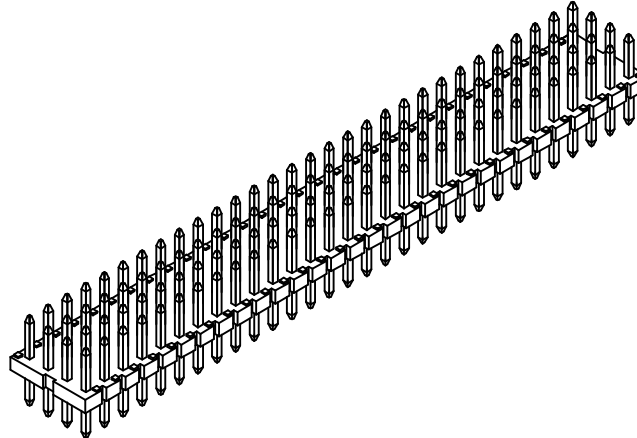

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (XPTB4) **P T Q** - **X X X X** - **X** - **A / B**

Number of Contacts

No. of contact = Code
24 to 96 Contacts
100 Contacts = A0
104 Contacts = A4
108 Contacts = A8
112 Contacts = B2
116 Contacts = B6
120 Contacts = C0

Connector Type


Definition	Code
Height 1.50mm	S1
©Standard: S1	

Contact Plating

Definition	Code
© Tin plated:	A
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
©Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
©Standard: K	

Pin Length mm

A	B
4.40	2.40
if you desire an other length, by marking put desired length in the A.	
©Standard: 4.40/2.40	

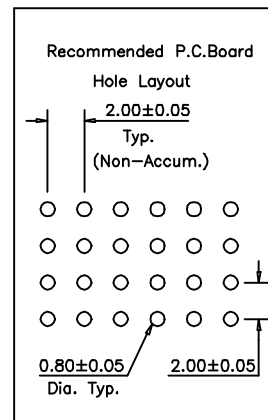

APTOS Technology - (831)-688-0881