

0.05" X 0.05" (1.27mm X 1.27mm) Side Entry Female Header Dual Row Board to Board Connector 06 to 100 Contacts With Polarization

APPLICATION AND FEATURES



1. High quality dual beam phosphor bronze contacts.
2. Designed for board to board small spacing interconnection.
3. Mating with 1.27mm pitch 0.4mm Pin Headers.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohm max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor Bronze.
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T

Finish: Gold plated

©Standard: Gold flash all over

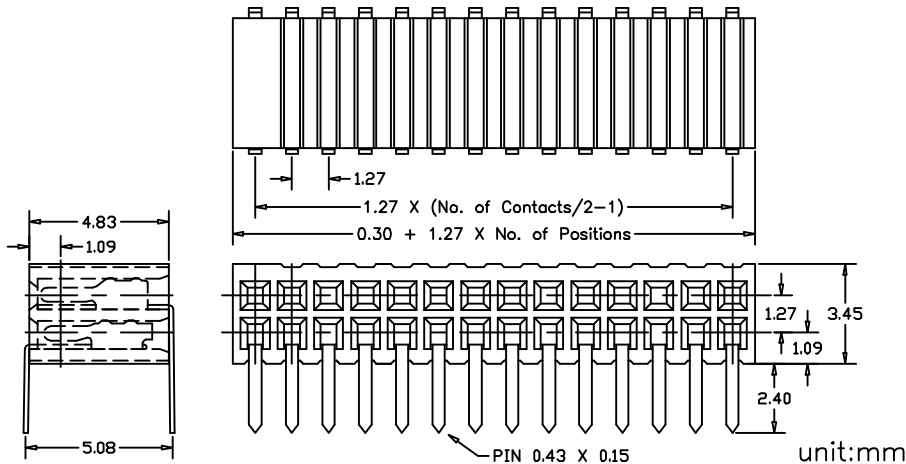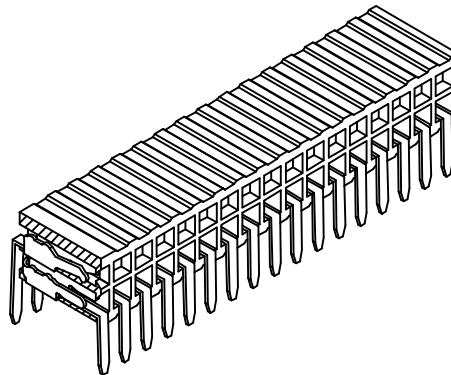

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (QPOC2) Q P O C Z - X X - X - 024 - M


Number of Contacts

No. of contact = Code
06 to 98 Contacts
100 Contacts = A0

Contact Plating

Definition	Code
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
©Standard: B	

Recommended P.C.Board Hole Layout



APTOS Technology - (831)-688-0881