


NOTE?

- 1.MATERIAL?**
 HOUSING?LCP+30% GLASS-FIBER REINFORCED,UL 94V-0 RATED.
 CONTACT?PHOSPHOR BRONZE.
 REINFORCED FITTINGS?BRASS.
 COVER?SUS 304.
- 2.FINISH?**
 CONTACT STANDARD?GOLD 30 μ^m MIN ON CONTACT AREA
 TIN 100 μ^m ON SOLDER AREA.
 REINFORCED FITTINGS STANDARD?100 μ^m MIN
- 3.SPECIFICATIONS?**
 ELECTRICAL?
 VOLTAGE RATING: AC 20V.
 CURRENT RATING: 1 AMPS.
 CONTACT RESISTANCE?20mΩ MAX INITIAL,40mΩ MAX FINAL.
 INSULATION RESISTANCE?DC 500V FOR 2 MINUTE.
 DIELECTRIC WITHSTANDING VOLTAGE?AC 500V FOR 1 MINUTE.
 MECHANICAL?
 INSERTION FORCE?1.0kg MIN.
 WITHDRAWAL FORCE?0.15~0.75kg.
 ENVIRONMENTAL?
 OPERATING TEMPERATURE? -55~85°.

*Product specifications are subject to change without notice. Please contact sales office for further confirmation.



GENERAL TOLERANCE		SCALE 1.5=1	DRAWN	DATE -09-01'	DWG. NO.	TITLE SMY Series	REV. 0.1
XX. ±	XXX. ±	UNIT MM	CHECK	DATE -09-01'	F:\DWG\CDWG\SMY0A.DWG		SHEET 1/2
X. ±	.XXX ±	SIZE A4	APPROVE	DATE -09-01'	PARTS NO. SMY-24-1		
.X ±	X. ±						
.XX ±	.X ±						

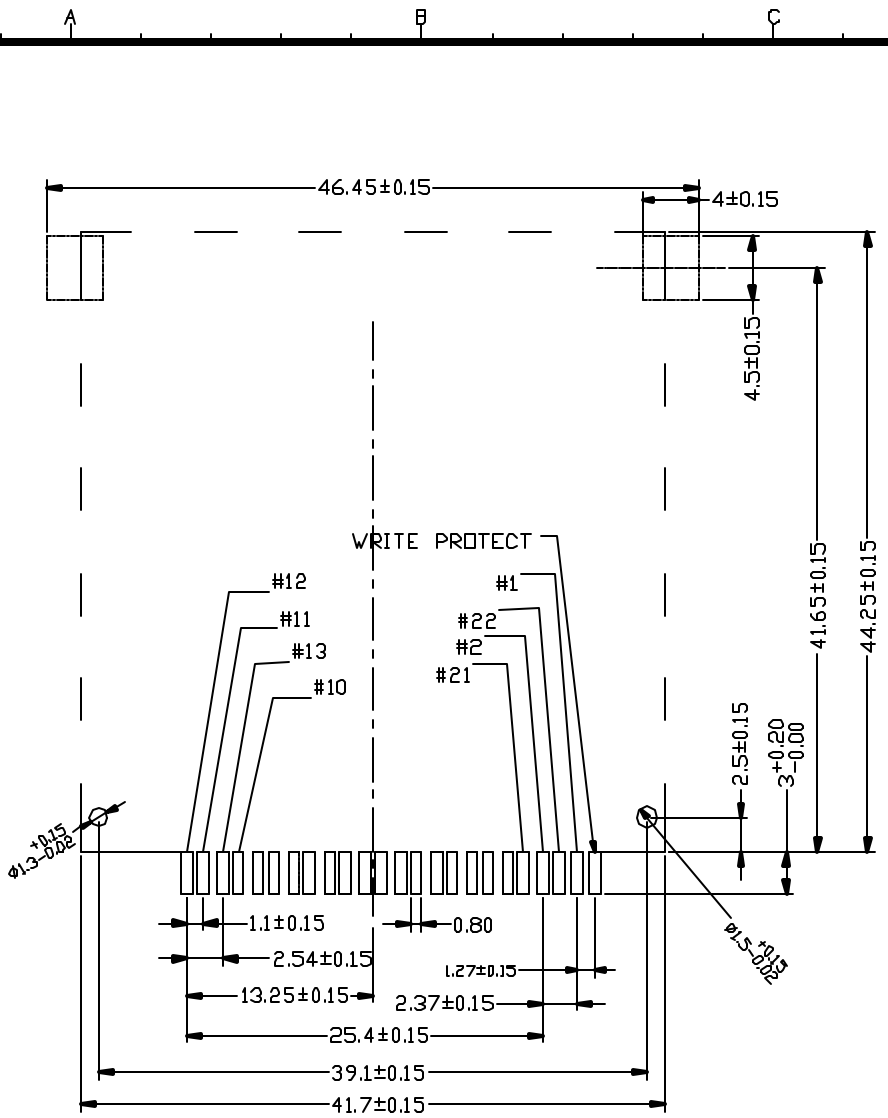

*Product specifications are subject to change without notice. Please contact sales office for further confirmation.

	GENERAL TOLERANCE		SCALE 2=1	DRAWN	DATE -09-01'	DWG. NO. F:\DWG\CDWG\SM0A.DWG	TITLE SMY Series	REV. 0.1
	XX. ±	XXX. ±	UNIT MM	CHECK	DATE -09-01'			PARTS NO. SMY-24-1
	X. ±	.XXX ±	SIZE A4	APPROVE	DATE -09-01'			
	.X ±	X. ±						
.XX ±	.X ±							