


SNBHY-XXR-X-060-X -0:W/O Locating peg
1:With Locating peg


No. of Contacts	DIMENSIONS	
	A	B
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
8	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

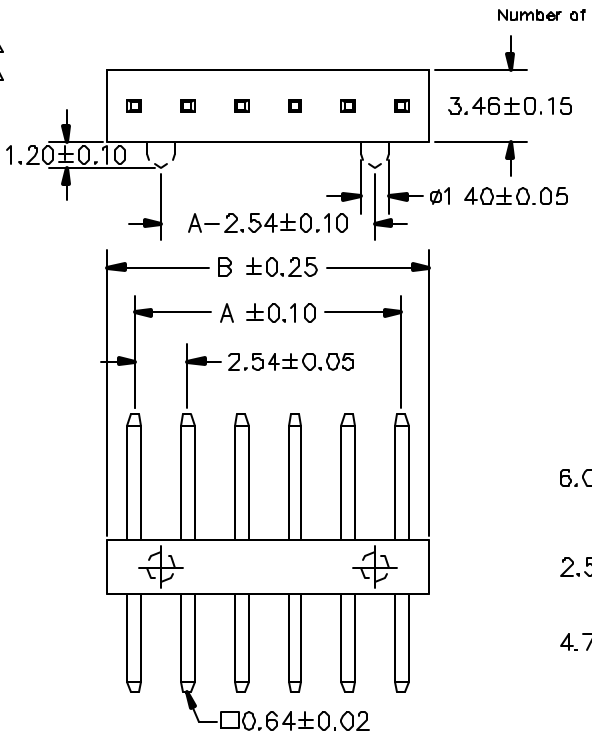

Number of Contacts

Contact Plating

Definition	Code
⊙ Tin plated:	A
⊙ Gold plated:	
flash B 15μ"	F
10μ" E 30μ" J	
⊙ Duplex plating:	
flash K 15μ" P	
10μ" N 30μ" U	
⊙ Standard: K	

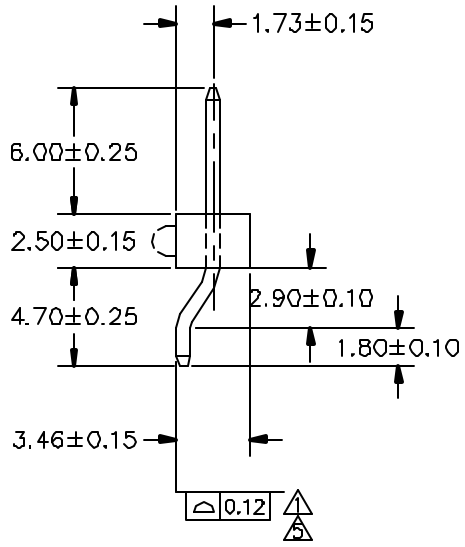


SPECIFICATIONS


Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms Min.
 Contact resistance: 20 m ohm Max. Δ
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: High Temperature Thermoplastic,UL 94V-0

Finish: Tin,Gold or Duplex plated
 ⊙ Standard: Duplex plated
 ⊙ Note:
 Duplex plating: gold plated on contact area, Tin on solder area

*Product specifications are subject to change without notice. Please contact sales office for further confirmation.

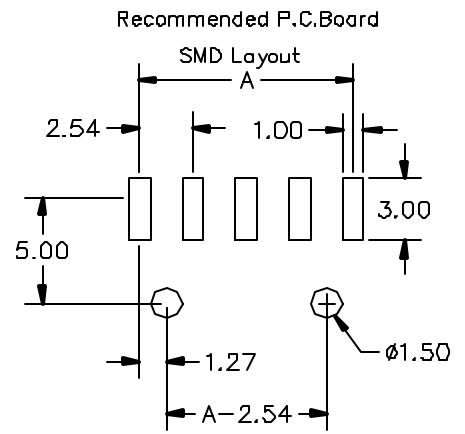

Δ SWED	VERSION	\square 0.15	15-01-00'
Δ 20 Megohms Max.	VERSION	20 m ohm Max.	15-01-00'
Δ SWPIN E	VERSION	\square 0.12	15-01-00'
Δ SNBHY-XXR-X-060-X	VERSION	SNBHY-XXR-X-060-X	25-10-00'
Δ SNBHY-XXR-X-060-X	VERSION	SNBHY-XXR-X-060-X	01-06-01'
Δ \square 0.15	VERSION	\square 0.12	19-10-01'
Δ SWPIN E	VERSION	\square 0.12	22-11-00'



GENERAL TOLERANCE	
XX. ±	XXX. ±
X. ±	.XXX ±
.X ±	.X. ±
XX ±	.X. ±

SCALE	3=1
UNIT	MM
SIZE	A4

DRAWN
CHECK
APPROVE

DATE	-11-01'
DATE	-11-01'
DATE	-11-01'

DWG. NO.
F:\DWG\CDWG\H\HYMOA.DWG
PARTS NO. Δ Δ
SNBHY-XXR-X-060-X

TITLE
SNBHY Series

REV. 1.6
SHEET 1/2