

0.1"(2.54mm) SMD Female Header

Dual Row 06 to 60 Contacts Profile:7.4mm



APPLICATION AND FEATURES

1. For profile application 7.4mm high.
2. Accept 0.64mm square pin header.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 1000 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor bronze
 Insulator Material: Polyester,UL 94V-0
 ©Standard: Nylon-6T

Finish: Tin,Gold plated
 ©Standard: Gold flash all over

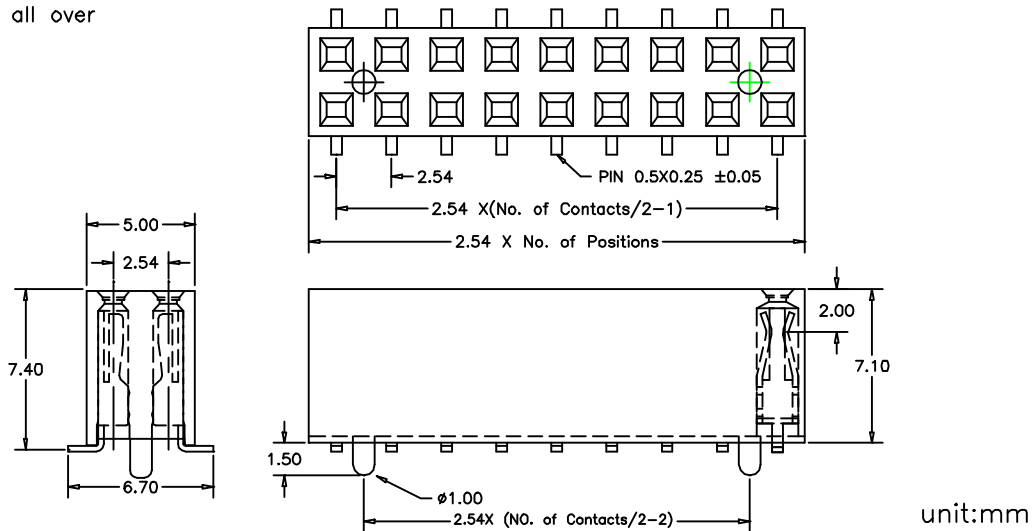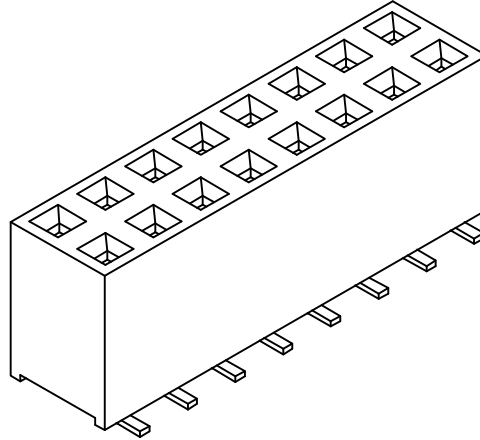

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (SPGF2) **S P G F Z** - **X X S** - **X** - **X**

0:W/O Locating peg
 1:With Locating peg

Number of Contacts


No. of contact = Code
06 to 60 Contacts

Contact Plating

Definition	Code
© Tin plated:	A
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J

©Standard: B

Recommended P.C.Board SMD Layout



APTOS Technology - (831)-688-0881