

0.1"(2.54mm) SMD BOX Header

Four Wall Shrouded

Dual Row Straight and Right Angle

APPLICATION AND FEATURES

1. Low-profile pin Headers are designed as mating devices for the I.D.C Socket.
2. Assures reliable flat cable-to-P.C.Board interconnection.
3. Fully shrouded.
4. No ejector latches for space saving.



SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 1000 V
 Operating Temperature: -40~+105°C
 Contact Material: Copper alloy
 Insulator Material: Polyester,UL 94V-0

©Standard:Nylon 6T

Finish: Tin,Gold plated

©Standard: Gold flash all over

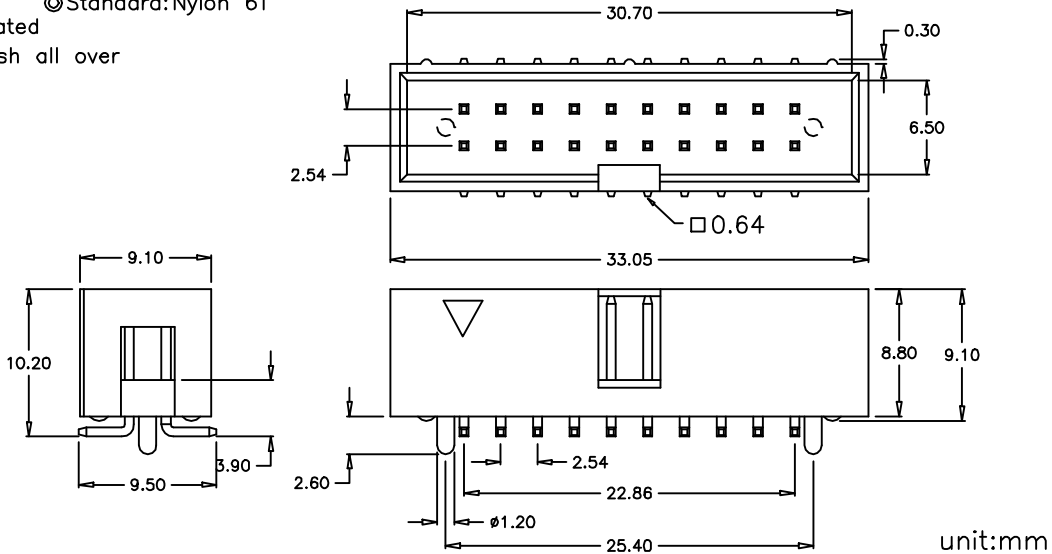

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (SPHS) **S P H S** - **X X** - **X** - **X** — 0:W/O Locating peg
 1:With Locating peg

Number of Contacts

No. of contact = Code
20

Contact Plating

Definition	Code
© Gold plated:	
flash B	15μ" F
10μ" E	30μ" J
©Standard: B	

Recommended P.C.Board Hole Layout

