
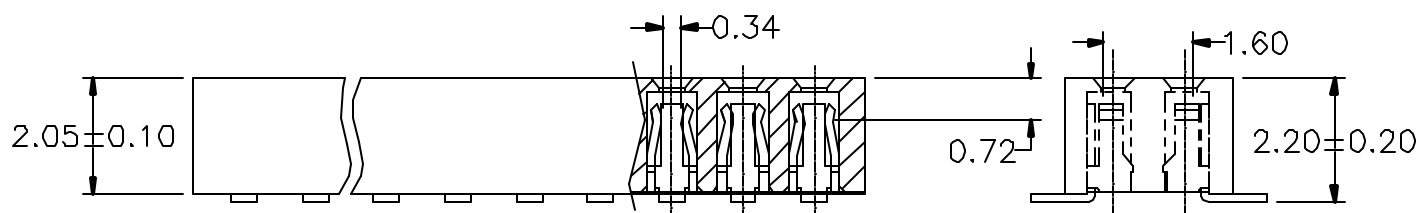


A B C D E

SPECIFICATIONS

Current Rating: 1 Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°-+105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Phosphor bronze
 Insulator Material: Polyester, UL 94V-0
 ⓈStandard: Nylon-6T


*Product specifications are subject to change without notice. Please contact sales office for further confirmation.

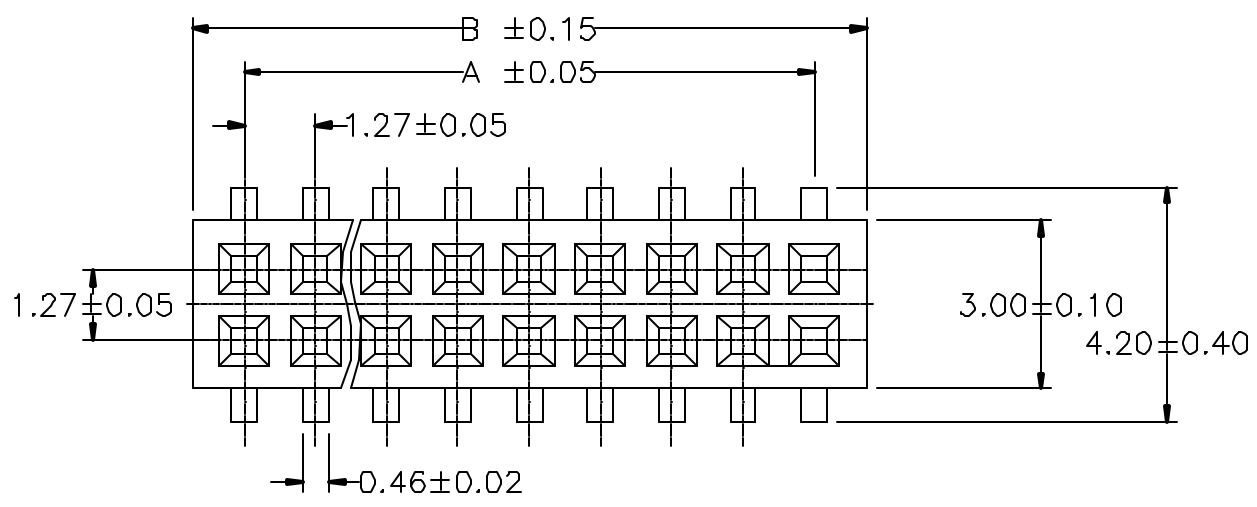

| No of Contacts | DIMENSIONS | | No. of Contacts | DIMENSIONS | |
|----------------|------------|-------|-----------------|------------|-------|
| | A | B | | A | B |
| 10 | 5.08 | 6.35 | 56 | 34.29 | 35.56 |
| 12 | 6.35 | 7.62 | 58 | 35.56 | 36.83 |
| 14 | 7.62 | 8.89 | 60 | 36.83 | 38.10 |
| 16 | 8.89 | 10.16 | 62 | 38.10 | 39.37 |
| 18 | 10.16 | 11.43 | 64 | 39.37 | 40.64 |
| 20 | 11.43 | 12.70 | 66 | 40.64 | 41.91 |
| 22 | 12.70 | 13.97 | 68 | 41.91 | 43.18 |
| 24 | 13.97 | 15.24 | 70 | 43.18 | 44.45 |
| 26 | 15.24 | 16.51 | 72 | 44.45 | 45.72 |
| 28 | 16.51 | 17.78 | 74 | 45.72 | 46.99 |
| 30 | 17.78 | 19.05 | 76 | 46.99 | 48.26 |
| 32 | 19.05 | 20.32 | 78 | 48.26 | 49.53 |
| 34 | 20.32 | 21.59 | 80 | 49.53 | 50.80 |
| 36 | 21.59 | 22.86 | 82 | 50.80 | 52.07 |
| 38 | 22.86 | 24.13 | 84 | 52.07 | 53.34 |
| 40 | 24.13 | 25.40 | 86 | 53.34 | 54.61 |
| 42 | 25.40 | 26.67 | 88 | 54.61 | 55.88 |
| 44 | 26.67 | 27.94 | 90 | 55.88 | 57.15 |
| 46 | 27.94 | 29.21 | 92 | 57.15 | 58.42 |
| 48 | 29.21 | 30.48 | 94 | 58.42 | 59.69 |
| 50 | 30.48 | 31.75 | 96 | 59.69 | 60.96 |
| 52 | 31.75 | 33.02 | 98 | 60.96 | 62.23 |
| 54 | 33.02 | 34.29 | 100 | 62.23 | 63.50 |

1
2
3

1
2
3



| GENERAL TOLERANCE | |
|-------------------|--------|
| XX. ± | XXX. ± |
| X. ± 0.20 | .XXX ± |
| .X ± 0.10 | X. ± |
| .XX ± 0.05 | .X ± |

| | |
|-------|-----|
| SCALE | 8=1 |
| UNIT | MM |
| SIZE | A4 |

DRAWN *X.R. Jiang*
 CHECK
 APPROVE

DATE 05-21-98'
 DATE
 DATE

DWG. NO.
 F:\DWG\CDWG\SPNAF2\SPNAF21A.DWG
 PARTS NO.
 SPNAF-XX-XXX-0

TITLE
 SPNAF Series

REV. 1.0
 SHEET 1/2

A B C D E