


.079"(2.0mm) Female Header SMD Bottom Entry Dual Row Board to Board Connector Low Profile:2.8mm 06 to 72 Contacts

APPLICATION AND FEATURES


1. Low profile: 2.8mm height.
2. High quality dual beam phosphor bronze contacts.
3. Mating with 2.0mm pitch □ 0.5mm Pin Headers.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor Bronze.
 Insulator Material: Polyester,UL 94V-0
 ©Standard:Nylon 6T

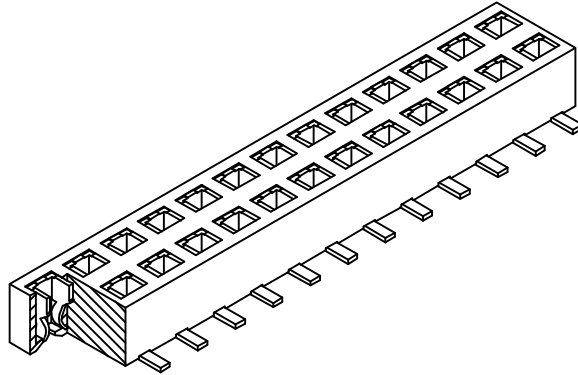

Finish: Tin,Gold plated
 ©Standard: Gold flash all over

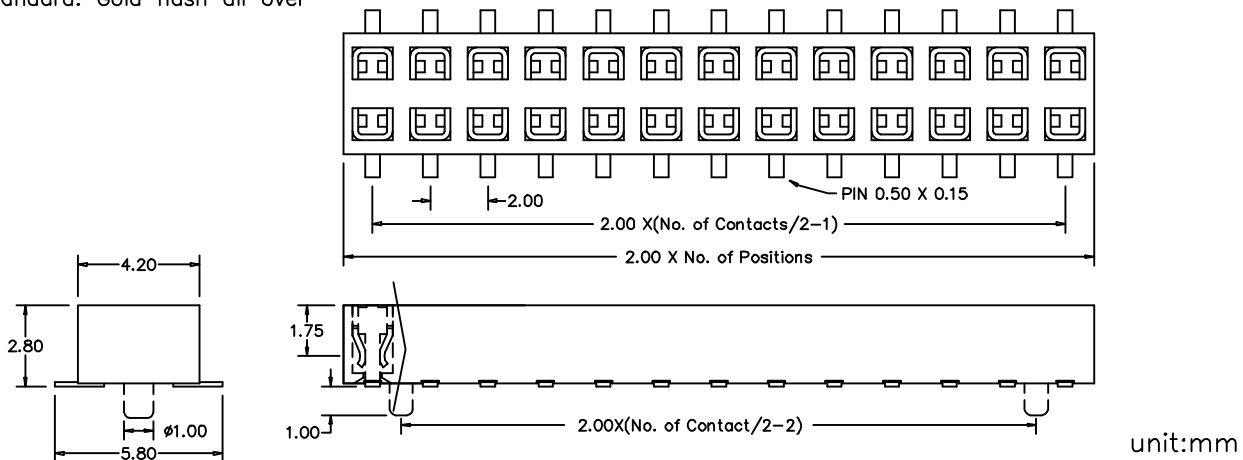

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (SPTFF) **S P T F F** - **X X** - **X** - **X** - 0:W/O Locating peg
 1:With Locating peg

Number of Contacts

No. of contact = Code
06 to 72 Contacts

Contact Plating

Definition	Code
© Tin plated:	A
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
©Standard: B	

Recommended P.C.Board SMT Layout

