

# .079" (2.0mm) Dual Row SMD

Header 10 to 60 Contacts Profile: 4.2mm

## APPLICATION AND FEATURES

1. Variable pin length gold plated.
2. Mate with 2.0mm pitch P.C.Board  
Female Connector and shunt connector.





## SPECIFICATIONS

Current Rating: 1 Amp  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°~+105°C  
 Max Processing Temp: 230° for 30 seconds  
 Contact Material: Copper alloy  
 Insulator Material: Polyester, UL 94V-0

©Standard: Nylon-6T

Finish: Tin, Gold plated

©Standard: Gold flash all over

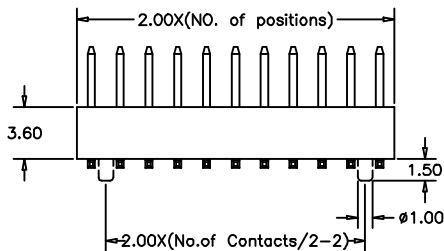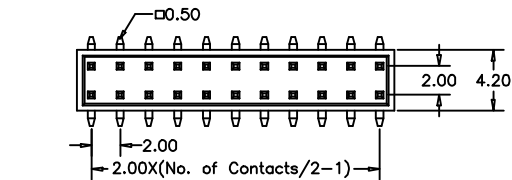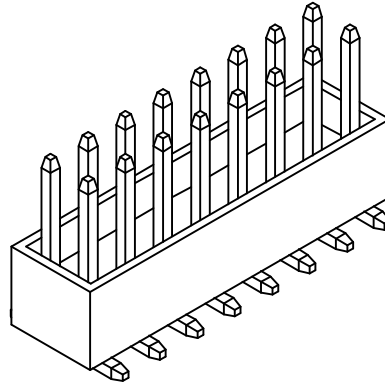

unit:mm

## How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N

(SPTG)

S P T G

X X X X

X

A

X

0:W/O Lcating peg  
1:With Lcating peg

### Number of Contacts

No. of contact = Code
10 to 60 Contacts

### Connector Type


Definition	Code
Height:C 4.2mm	S7

### Contact Plating

Definition	Code
© Tin plated:	A
© Gold plated:	
flash	B
15μ"	F
10μ"	E
30μ"	J
©Standard: B	

### Pin Length mm

A
4.00
©Standard: 4.00

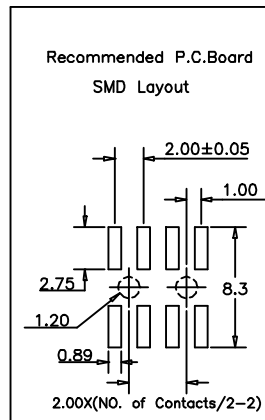

APTOS Technology - (831)-688-0881