




0.79" X 0.79" (2.00 X 2.00) SMD Pin Header Box Type Dual Row Profile: 6.6mm 0.5mm Square Post

APPLICATION AND FEATURES

- Mate with 2.0mm pitch P.C.Board
Female Connector and shunt connector .

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° - +105°C
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T
 Finish: Gold plated

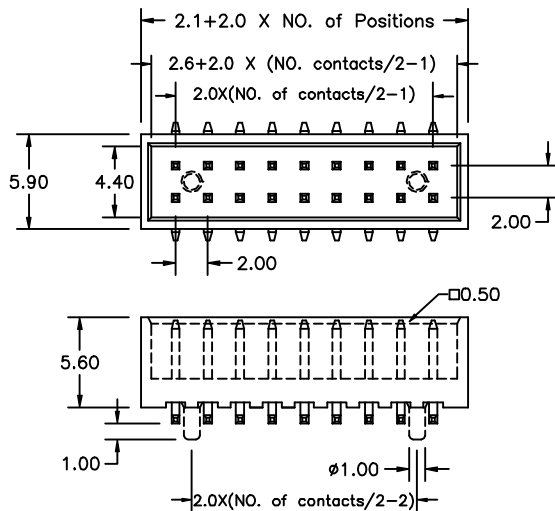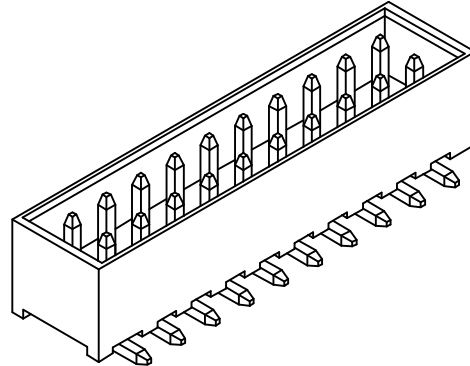

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (SPTSX) **S P T S** - **X X** - **X** - **X** — 0 : W/O Locating peg
 1 : With Locating peg

Number of Contacts

No. of contact = Code
06 to 80 Contacts

--

--

Contact Plating

Definition	Code
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J

©Standard: B

