

0.79" X 0.79" (2.00 X 2.00) SMD Pin Header Box Type Dual Row Profile: 8.3mm 0.5mm Square Post



APPLICATION AND FEATURES

- Mate with 2.0mm pitch P.C.Board
Female Connector and shunt connector .

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° - +105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T

Finish: Gold plated
 ©Standard: Gold flash all over

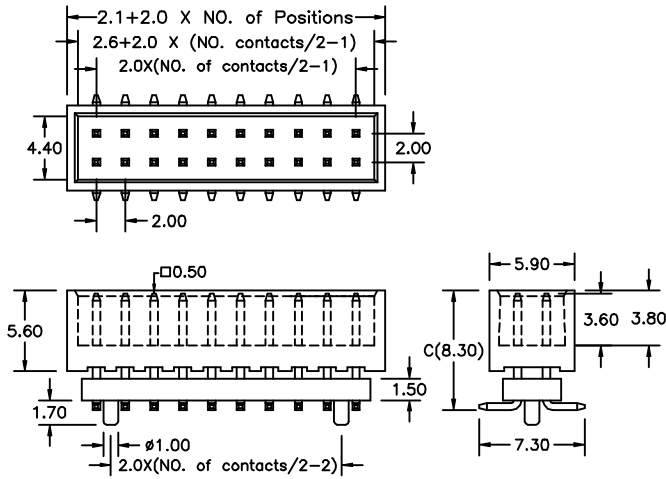

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

NEW P/N
S P T U - X X - C - X
 0 : W/O Locating peg
 1 : With Locating peg

Number of Contacts


No. of contact = Code
06 to 80 Contacts

Contact Plating

Definition	Code
© Gold plated:	
flash B	15μ" F
10μ" E	30μ" J
©Standard: B	

Pin Length mm

C
8.3
if you desire an other length, by marking put desired length in the C
© Standard: 8.3

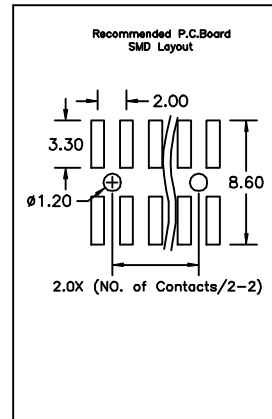

APTOS Technology - (831)-688-0881