

0.079" (2.0mm) SMD Low Profile: 2.2mm Dual Row, SMD Pin Header 06 to 80 Contacts

APPLICATION AND FEATURES





1. Variable pin length, gold plated.
2. Mate with 2.0mm pitch P.C.Board Female Connector and shunt connector.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T

Finish: Gold plated

©Standard: Gold flash all over

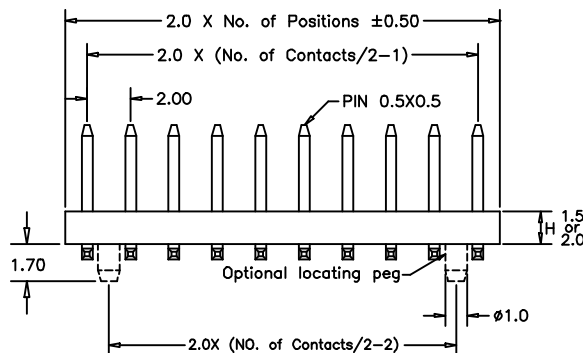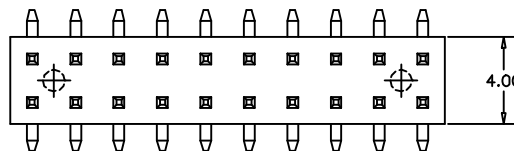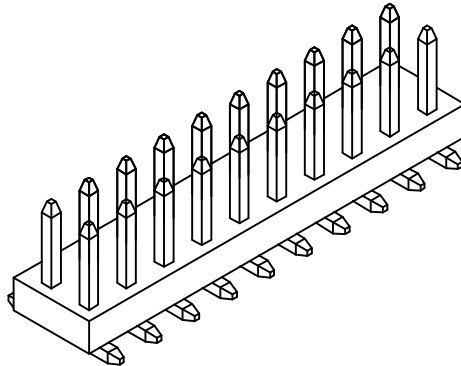

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (SPTB2) **S P T Z** - **X X X X** - **X** - **A** - **X** — 0:W/O Locating peg
 1:With Locating peg


Number of Contacts **Connector Type** **Contact Plating** **Pin Length mm**

No. of contact = Code
06 to 80 Contacts

Definition	Code
Height:c	S3
2.2mm	S3
2.7mm	S4
© Standard: S3	

Definition	Code
© Gold plated:	
flash	B 15μ" F
10μ"	E 30μ" J
©Standard: B	

A1
S3:4.0
S4:3.5
© Standard: 4.0

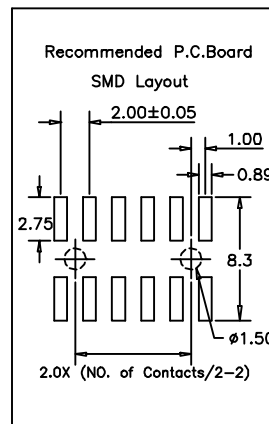

APTOS Technology - (831)-688-0881