

0.039" (1.00mm) SMD Female Header

Dual Row 10 to 100 Contacts Profile: 2.22mm

APPLICATION AND FEATURES



1. For profile application 2.22mm high.
2. Accept 0.30mm square pin header.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms Min.
 Contact resistance: 20 m ohm Max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° ~ +105°C
 Contact Material: Phosphor Bronze.
 Insulator Material: Polyester, UL 94V-0
 ©Standard: L.C.P

Finish: Gold plated

© Standard : Gold flash all over nickel

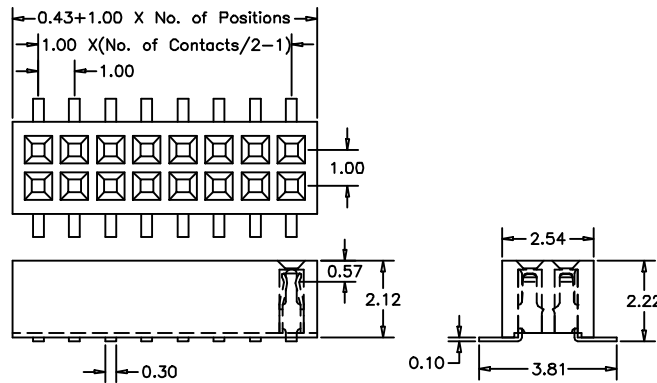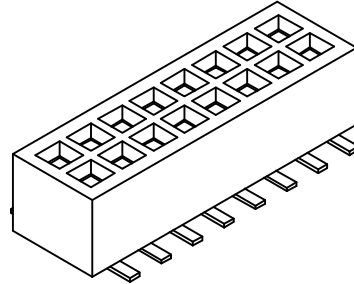

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

NEW P/N
S P U F Z - X X S 3 - X - 0 — 0:W/O Locating peg

Number of Contacts

No. of contact = Code
10 to 98 Contacts
100 Contacts = A0


Connector Type

Definition	Code
Height: 2.12mm	S3

Contact Plating

Definition	Code
© Gold plated:	
flash	B 15μ" F
	10μ" E 30μ" J
©Standard: B	

Recommended P.C.Board SMD Layout



APTOS Technology - (831)-688-0881