

0.05"×0.05" (1.27×1.27mm) SMD Female Header Dual Row 06 to 100 Contacts For 0.4mm Square Post Mating

APPLICATION AND FEATURES



1. Variable with gold plated.
2. Mated with P.C. board connector.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contacts resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor bronze
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T

Finish: Gold plated

©Standard: Gold flash all over

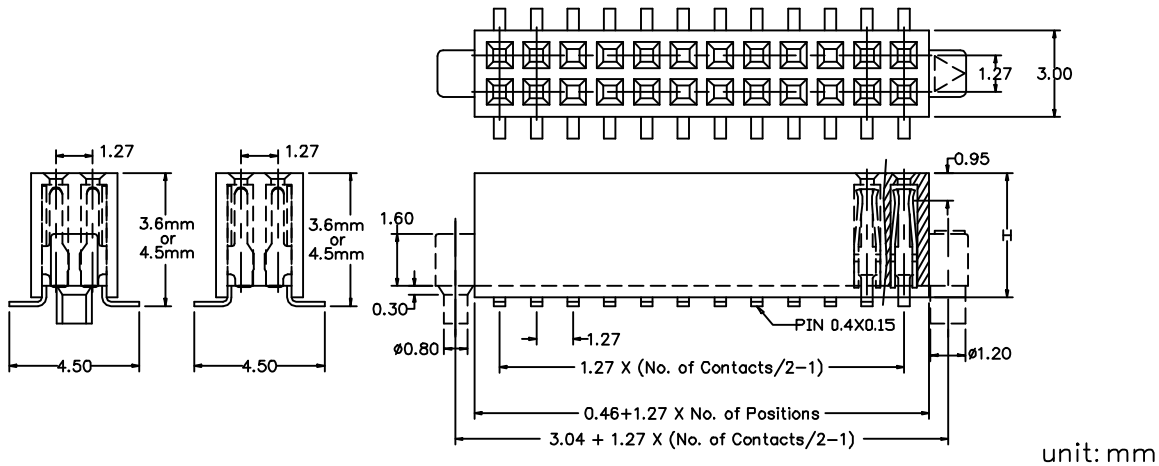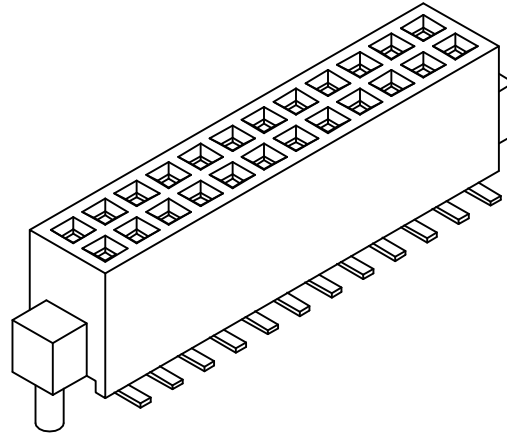

unit: mm

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (SQPOFZ) S Q P O F Z - X X X X - X - X
 0 : W/O Locating peg
 1 : With Locating peg

Number of Contacts


No. of contact = Code
06 to 98 Contacts
100 Contacts = A0

Connector Type

Definition	Code
Height:H	
3.6mm	S1
4.5mm	S2
© Standard: S1	

Contact Plating

Definition	Code
© Gold plated:	
flash	B
15μ"	F
10μ"	E
30μ"	J
©Standard: B	

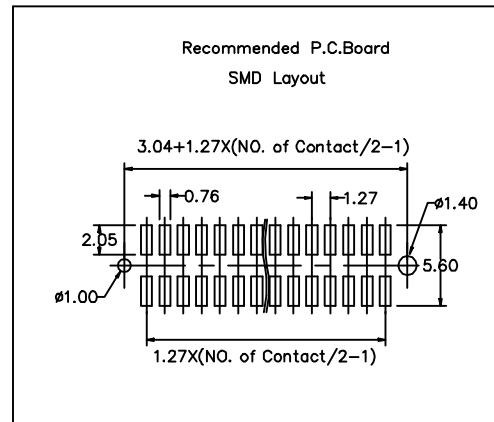

APTOS Technology - (831)-688-0881