

0.039" (1.00mm) Center SMD Pin Header

Low Profile: 1.8mm Dual Row 10 to 100 Contacts

0.3mm Square Post

APPLICATION AND FEATURES

1. Variable pin length.
2. Mates with P.C. Board connectors




SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0

©Standard: L.C.P

Finish: Tin, Gold plated

©Standard: Gold flash all over

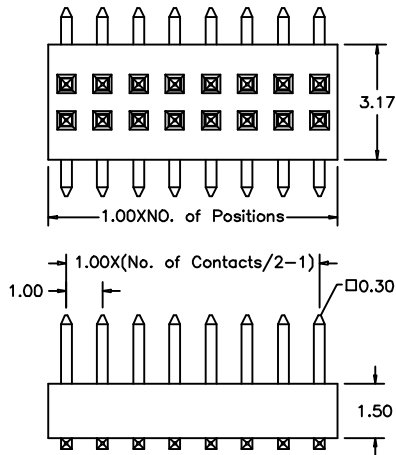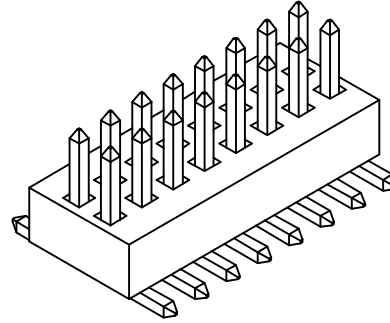

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

NEW P/N

S X U A Z - X X S 2 - X - A - 0 — 0:W/O Locating peg

Number of Contacts

No. of contact = Code
10 to 98 Contacts
100 Contacts = A0

Connector Type


Definition	Code
Height:C 1.5mm	S2

Contact Plating

Definition	Code
© Gold plated:	
flash	B
15μ"	F
10μ"	E
30μ"	J
© Standard: B	

Pin Length mm

A
1.9
if you desire an other length, by marking put desired length in the A.

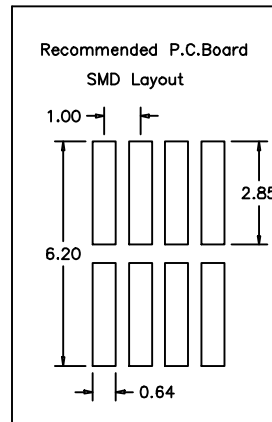

APTOS Technology - (831)-688-0881