

0.1" (2.54mm) Pin Header

Triple Row

09 to 120 Contacts, Straight and Right Angle

APPLICATION AND FEATURES

1. Notches for easy breakable.
2. Variable pin length, gold or tin plated.
3. Standoffs facilitate post soldering clean.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 1000 V
 Operating Temperature: -40°~+105°C
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0




©Standard: P.B.T

Finish: Tin, Gold or Duplex plated

©Standard: Gold flash all over

©Note:

Duplex plating: gold plated on contact area,
 Tin on solder area

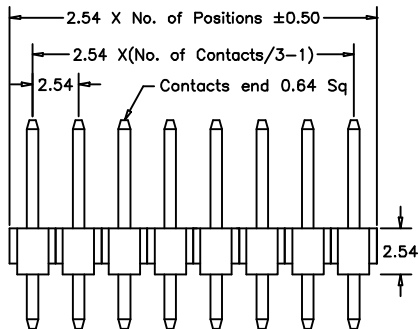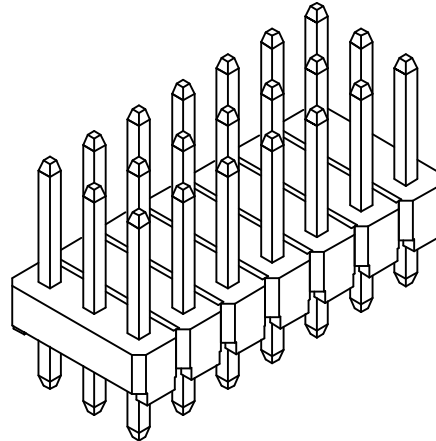

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (XPHB3) X H W - X X X - X - A / B

Pin Type

Number of Contacts

No. of contact = Code
09 to 99 Contacts
102 Contacts = A2
105 Contacts = A5
108 Contacts = A8
111 Contacts = B1
114 Contacts = B4
117 Contacts = B7
120 Contacts = C0

Connector Type


Definition	Code
Straight	S
Pin Type	
Definition	Code
Pin Material:	
Brass	L
Bronze	B
Phosphor Bronze	P
© Standard:	L

Contact Plating

Definition	Code
© Tin plated:	A
© Gold plated:	
flash	B
15μ"	F
10μ"	E
30μ"	J
© Duplex plating:	
flash	K
15μ"	P
10μ"	N
30μ"	U
©Standard:	B

Pin Length mm

A	B
6.0	3.0
if you desire an other length, by marking put desired length in the A / B.	
© Standard: 6.0/3.0	

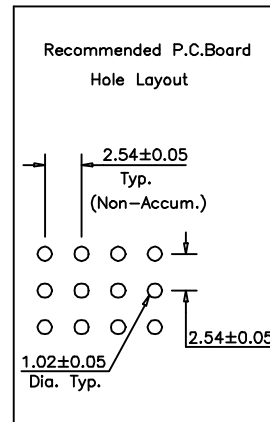

APTOS Technology - (831)-688-0881