

0.1" (2.54mm) Pin Header

Dual Row

04 to 80 Contacts

APPLICATION AND FEATURES

1. Notches for easy breakable.
2. Mate with Mini Jumper and P.C.Board socket connectors.

SPECIFICATIONS




Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 1000 V
 Operating Temperature: -40°~+105°C
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0
 ©Standard: P.B.T

Finish: Tin, Gold or Duplex plated


©Standard: Gold flash all over

©Note:

Duplex plating: gold plated on contact area,
 Tin on solder area

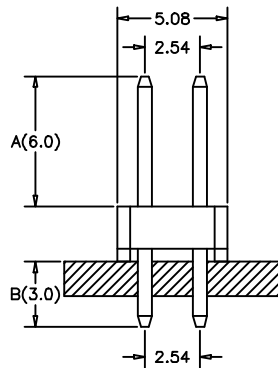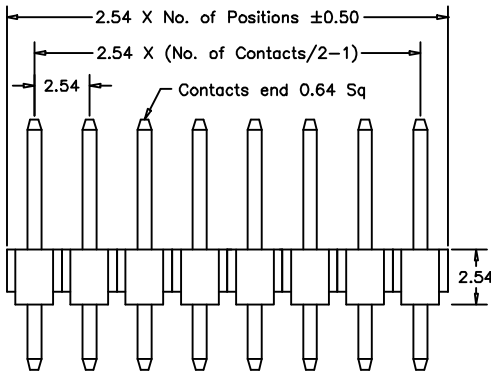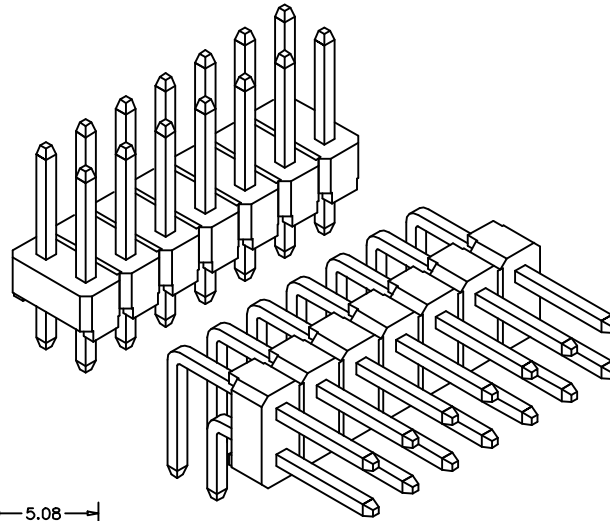

S Type

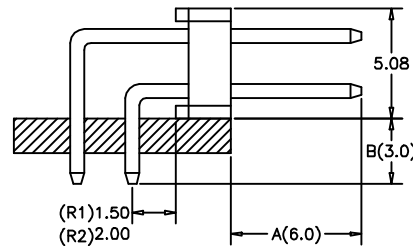

R Type

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N

(XPHB2)

X H Z - X X X X - X - A / B

(Pin type)

Number of Contacts

No. of contact = Code	
04 to 80 Contacts	
Pin Type	
Definition	Code
Pin Material:	
Brass	L
Bronze	B
Phosphor Bronze	P
©Standard: L	

Connector Type


Definition	Code
Straight	S
Right Angle	
1.5mm	R1
2.0mm	R2

Contact Plating

Definition	Code
© Tin plated:	A
© Gold plated:	
flash	B
15μ"	F
10μ"	E
30μ"	J
©Duplex plating:	
flash	K
15μ"	P
10μ"	N
30μ"	U
©Standard: B	

Pin Length mm

A	B
6.0	3.0
if you desire an other length, by marking put desired length in the A / B.	
©Standard: 6.0/3.0	

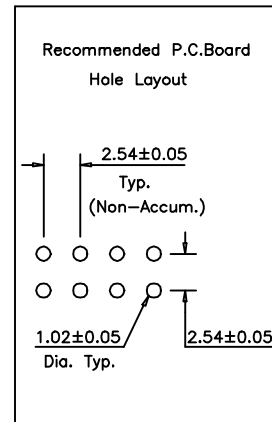

APTOS Technology - (831)-688-0881