

0.1" (2.54) Shrouded Header

Single Row 02 to 04 Contacts

APPLICATION AND FEATURES










- Standoffs facilitate post solder cleaning.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 1000 V
 Operating Temperature: -40°~+105°C
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0
 © Standard: P.B.T

Finish: Gold plated

© Standard: Gold flash all over

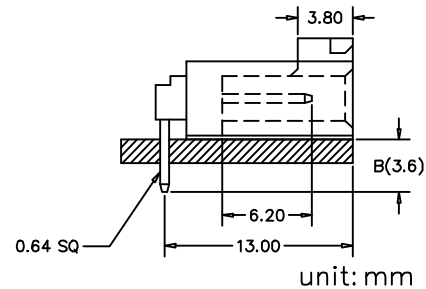

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N

(XPHI) XPHI - XXX - X - B

(Pin type)

Number of Contacts

No. of contact = Code	
02 03 04	
Pin Type	
Definition	Code
Pin Material:	
Brass	L
Bronze	B
Phosphor Bronze	P
© Standard: L	

Connector Type


Definition	Code
Straight	S
Right Angle	R

Contact Plating

Definition	Code
© Gold plated:	
flash	B 15μ" F
	10μ" E 30μ" J
© Standard: B	

Pin Length mm

S-B	R-B
3.0	3.6
© Standard: 3.0/3.6	

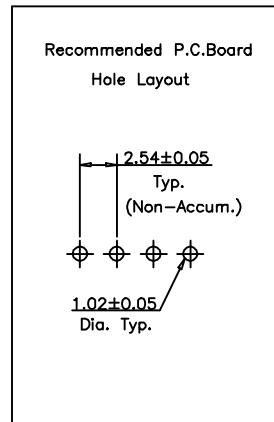

APTOS Technology - (831)-688-0881