

.079" (2.0mm) Pin Header

Dual Row 04 to 80 Contacts

Straight and Right Angle

APPLICATION AND FEATURES

1. Notches for easy breakable.
2. Variable pin length, selective gold or tin plated.
3. Standoffs facilitate post soldering clean.
4. Mate with P.C. Board connectors.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40~+105°C
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0





©Standard: P.B.T

Finish: Tin, Gold or Duplex plated

©Standard: Gold flash all over

©Note:

Duplex plating: gold plated on contact area,
 Tin on solder area

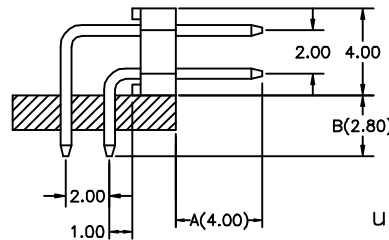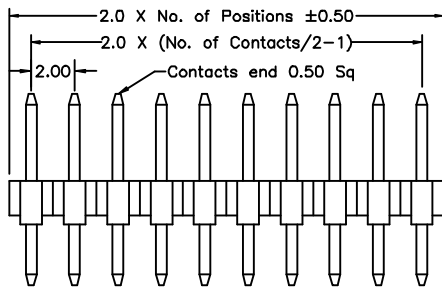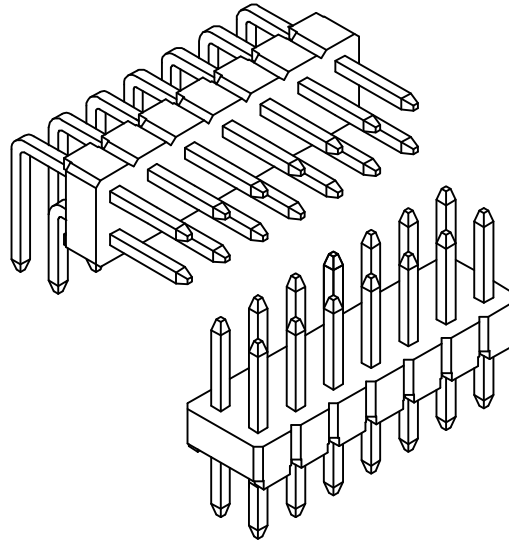

unit:mm

How to order

Please replace "X" with appropriate coding listed in the tables below

OLD P/N / NEW P/N
 (XPTB2) X T Z - X X X X - X - A / B

Pin type

Number of Contacts

No. of contact = Code	
04 to 80 Contacts	
Pin Type	
Definition	Code
Pin Material:	
Brass	L
Bronze	B
Phosphor Bronze	P
©Standard: L	

Connector Type


Definition	Code
Height:H	
1.5mm	S1
2.0mm	S2
Right Angle	
2.0mm	R2
©Standard:	
	S2
	R2

Contact Plating

Definition	Code
© Tin plated:	A
© Gold plated:	
flash	B
15μ"	F
10μ"	E
30μ"	J
©Duplex plating:	
flash	K
15μ"	P
10μ"	N
30μ"	U
©Standard: B	

Pin Length mm

A	B
4.0	2.8
if you desire an other length, by marking put desired length in the A / B.	
©Standard: 4.0/2.8	

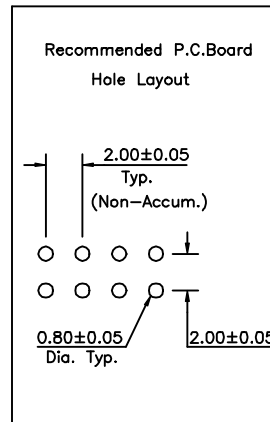

APTOS Technology - (831)-688-0881